



**BSI Standards Publication**

# **Seamless steel tubes for pressure purposes — Technical delivery conditions**

Part 3: Alloy fine grain steel tubes

**National foreword**

This British Standard is the UK implementation of EN 10216-3:2013. It supersedes BS EN 10216-3:2002 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee ISE/110, Steel Tubes, and Iron and Steel Fittings.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2013. Published by BSI Standards Limited 2013

ISBN 978 0 580 68642 9

ICS 23.040.10; 77.140.75

**Compliance with a British Standard cannot confer immunity from legal obligations.**

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 December 2013.

**Amendments issued since publication**

| Date | Text affected |
|------|---------------|
|------|---------------|

---

EUROPEAN STANDARD  
NORME EUROPÉENNE  
EUROPÄISCHE NORM

# EN 10216-3

December 2013

ICS 23.040.10; 77.140.75

Supersedes EN 10216-3:2002

English Version

## Seamless steel tubes for pressure purposes - Technical delivery conditions - Part 3: Alloy fine grain steel tubes

Tubes sans soudure en acier pour service sous pression -  
Conditions techniques de livraison - Partie 3 : Tubes en  
acier allié à grain fin

Nahtlose Stahlrohre für Druckbeanspruchungen -  
Technische Lieferbedingungen - Teil 3: Rohre aus legierten  
Feinkornbaustählen

This European Standard was approved by CEN on 17 August 2013.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels



| <b>Contents</b>                                                                              | <b>Page</b> |
|----------------------------------------------------------------------------------------------|-------------|
| Foreword .....                                                                               | 4           |
| 1 Scope .....                                                                                | 5           |
| 2 Normative references .....                                                                 | 5           |
| 3 Terms and definitions .....                                                                | 6           |
| 4 Symbols .....                                                                              | 6           |
| 5 Classification and designation .....                                                       | 7           |
| 5.1 Classification .....                                                                     | 7           |
| 5.2 Designation .....                                                                        | 7           |
| 6 Information to be supplied by the purchaser .....                                          | 7           |
| 6.1 Mandatory information .....                                                              | 7           |
| 6.2 Options .....                                                                            | 8           |
| 6.3 Examples of an order .....                                                               | 8           |
| 7 Manufacturing process .....                                                                | 9           |
| 7.1 Steelmaking process .....                                                                | 9           |
| 7.2 Tube manufacture and delivery conditions .....                                           | 9           |
| 8 Requirements .....                                                                         | 10          |
| 8.1 General .....                                                                            | 10          |
| 8.2 Chemical composition .....                                                               | 10          |
| 8.3 Mechanical properties .....                                                              | 10          |
| 8.4 Appearance and internal soundness .....                                                  | 18          |
| 8.5 Straightness .....                                                                       | 18          |
| 8.6 Preparation of ends .....                                                                | 18          |
| 8.7 Dimensions, masses and tolerances .....                                                  | 19          |
| 9 Inspection .....                                                                           | 23          |
| 9.1 Types of inspection .....                                                                | 23          |
| 9.2 Inspection documents .....                                                               | 24          |
| 9.3 Summary of inspection and verification testing .....                                     | 24          |
| 10 Sampling .....                                                                            | 26          |
| 10.1 Frequency of tests .....                                                                | 26          |
| 10.2 Preparation of samples and test pieces .....                                            | 26          |
| 11 Verification test methods .....                                                           | 27          |
| 11.1 Chemical analysis .....                                                                 | 27          |
| 11.2 Tensile test .....                                                                      | 28          |
| 11.3 Flattening test .....                                                                   | 28          |
| 11.4 Ring tensile test .....                                                                 | 28          |
| 11.5 Drift expanding test .....                                                              | 29          |
| 11.6 Ring expanding test .....                                                               | 29          |
| 11.7 Impact test .....                                                                       | 29          |
| 11.8 Leak tightness test .....                                                               | 30          |
| 11.9 Dimensional inspection .....                                                            | 30          |
| 11.10 Visual examination .....                                                               | 31          |
| 11.11 Non-destructive testing .....                                                          | 31          |
| 11.12 Material identification .....                                                          | 31          |
| 11.13 Retests, sorting and reprocessing .....                                                | 31          |
| 12 Marking .....                                                                             | 31          |
| 12.1 Marking to be applied .....                                                             | 31          |
| 12.2 Additional marking .....                                                                | 32          |
| 13 Protection .....                                                                          | 32          |
| Annex A (informative) Elevated temperature properties for steel grades P275NL1 and NL2 ..... | 33          |
| Annex B (informative) Technical changes from the previous edition .....                      | 34          |
| B.1 Introduction .....                                                                       | 34          |
| B.2 Technical changes .....                                                                  | 34          |

|                                                                                                                                         |           |
|-----------------------------------------------------------------------------------------------------------------------------------------|-----------|
| <b>Annex ZA (informative) Relationship between this European Standard and the Essential Requirements of EU Directive 97/23/EC .....</b> | <b>35</b> |
| <b>Bibliography .....</b>                                                                                                               | <b>36</b> |

DRAFT

## Foreword

This document (EN 10216-3:2013) has been prepared by Technical Committee ECISS/TC 110 "Steel tubes and fittings for steel tubes", the secretariat of which is held by UNI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by June 2014, and conflicting national standards shall be withdrawn at the latest by June 2014.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN 10216-3:2002.

For the list of the most significant technical changes that have been made in this new edition, see Annex B.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive(s).

For relationship with EU Directive(s), see informative Annex ZA, which is an integral part of this document.

This European Standard consists of the following parts, under the general title "*Seamless steel tubes for pressure purposes – Technical delivery conditions*":

- *Part 1 :Non-alloy and alloy steels tubes with specified room temperature properties;*
- *Part 2 :Non-alloy and alloy steel tubes with specified elevated temperature properties;*
- *Part 3: Alloy fine grain steel tubes* (the present document);
- *Part 4 :Non-alloy and alloy steel tubes with specified low temperature properties;*
- *Part 5 :Stainless steel tubes.*

Another European Standard series covering tubes for pressure purposes is:

EN 10217, *Welded steel tubes for pressure purposes – Technical delivery conditions.*

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



## 1 Scope

This European Standard specifies the technical delivery conditions in two test categories for seamless tubes of circular cross section, made of weldable alloyed fine grained steel.

NOTE Once this standard is published in the Official Journal of the European Union (OJEU) under Directive 97/23/EC, presumption of conformity to the Essential Safety Requirements (ESR) of Directive 97/23/EC is limited to technical data of materials in this standard and does not presume adequacy of the material to a specific item of equipment. Consequently, the assessment of the technical data stated in this material standard against the design requirements of this specific item of equipment to verify that the ESRs of the Pressure Equipment Directive are satisfied, needs to be done by the designer or manufacturer of the pressure equipment, taking also into account the subsequent manufacturing processes which may affect properties of the base materials.

## 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 10020, *Definitions and classification of grades of steel*

EN 10021, *General technical delivery conditions for steel products*

EN 10027-1, *Designation systems for steels - Part 1: Steel names*

EN 10027-2, *Designation systems for steels - Part 2: Numerical system*

EN 10052, *Vocabulary of heat treatment terms for ferrous products*

EN 10168:2004, *Steel products - Inspection documents - List of information and description*

EN 10204:2004, *Metallic products - Types of inspection documents*

EN 10220, *Seamless and welded steel tubes - Dimensions and masses per unit length*

EN 10266, *Steel tubes, fittings and structural hollow sections - Symbols and definitions of terms for use in product standards*

CEN/TR 10261, *Iron and steel - Review of available methods of chemical analysis*

EN ISO 148-1:2010, *Metallic materials - Charpy pendulum impact test - Part 1: Test method (ISO 148-1:2009)*

EN ISO 377:2013, *Steel and steel products - Location and preparation of samples and test pieces for mechanical testing (ISO 377:2013)*

EN ISO 643, *Steels - Micrographic determination of the apparent grain size (ISO 643)*

EN ISO 2566-1, *Steel - Conversion of elongation values - Part 1: Carbon and low-alloy steels (ISO 2566-1)*

EN ISO 6892-1:2009, *Metallic materials - Tensile testing - Part 1: Method of test at room temperature (ISO 6892-1:2009)*

EN ISO 6892-2:2011, *Metallic materials - Tensile testing - Part 1: Method of test at elevated temperature (ISO 6892-2:2011)*

EN ISO 8492:2004, *Metallic materials - Tube - Flattening test (ISO 8492:1998)*

EN ISO 8493:2004, *Metallic materials - Tube - Drift expanding test (ISO 8493:1998)*

EN ISO 8495:2004, *Metallic materials - Tube - Ring expanding test (ISO 8495:1998)*

EN ISO 8496:2004, *Metallic materials - Tube - Ring tensile test (ISO 8496:1998)*

EN ISO 10893-1, *Non-destructive testing of steel tubes - Part 1: Automated electromagnetic testing of seamless and welded (except submerged arc-welded) steel tubes for the verification of hydraulic leak-tightness (ISO 10893-1)*

EN ISO 10893-8, *Non-destructive testing of steel tubes - Part 8: Automated ultrasonic testing of seamless and welded steel tubes for the detection of laminar imperfections (ISO 10893-8)*

EN ISO 10893-3, *Non-destructive testing of steel tubes - Part 3: Automated full peripheral flux leakage testing of seamless and welded (except submerged arc-welded) ferromagnetic steel tubes for the detection of longitudinal and/or transverse imperfections (ISO 10893-3)*

EN ISO 10893-10, *Non-destructive testing of steel tubes - Part 10: Automated full peripheral ultrasonic testing of seamless and welded (except submerged arc-welded) steel tubes for the detection of longitudinal and/or transverse imperfections (ISO 10893-10)*

EN ISO 14284:2002, *Steel and iron - Sampling and preparation of samples for the determination of chemical composition (ISO 14284)*

ISO 11484:2009, *Steel products - Employer's qualification system for non-destructive testing (NDT) personnel*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 10020, EN 10021, EN 10052, EN 10266 and the following apply.

#### 3.1 test category

classification that indicates the extent and level of inspection and testing

#### 3.2 employer

organization for which a person works on a regular basis

Note 1 to entry: The employer may be either the tube manufacturer or supplier or a third party organization providing Non-Destructive Testing (NDT) services.

#### 3.3 fine grain steel

steel having a ferritic grain size equal to or finer than 6 in accordance with EN ISO 643

### 4 Symbols

For the purpose of this document, the symbols given in EN 10266 and the following apply.

- $d$  specified inside diameter
- $d_{min}$  specified minimum inside diameter
- $T_{min}$  specified minimum wall thickness
- $D_c$  calculated outside diameter
- $d_c$  calculated inside diameter



- $T_c$       calculated wall thickness
- TC      test category

## 5 Classification and designation

### 5.1 Classification

**5.1.1** This Part of EN 10216 covers steel grades in four qualities (see Table 2 and Table 4):

- the basic quality (P ... N, Q);
- the elevated temperature quality (P ... NH, QH);
- the low temperature quality (P ... NL1, QL, QL1);
- the special low temperature quality (P ... NL2, QL2).

**5.1.2** In accordance with the classification system in EN 10020, the steel grades P275NL1, P355N, P355NH and P355NL1 are classified as alloy quality steels and the other steel grades are classified as alloy special steels.

### 5.2 Designation

**5.2.1** For the tubes covered by this Part of EN 10216 steel, the designation consists of:

- the number of this Part of EN 10216;
- plus either
- the steel name in accordance with EN 10027-1;
- or
- the steel number allocated in accordance with EN 10027-2.

**5.2.2** The steel name is designated by:

- the capital letter P for pressure purposes;
- the indication of the specified minimum yield strength for the lowest applicable wall thickness group expressed in megapascals (Table 4);
- one of the additional symbols N, NH, NL1, NL2, Q, QH, QL, QL1 or QL2 (see 5.1.1, Table 2 and Table 4).

## 6 Information to be supplied by the purchaser

### 6.1 Mandatory information

The following information shall be supplied by the purchaser at the time of enquiry and order:

- a) the quantity (mass or total length or number);
- b) the term "tube";
- c) the dimensions (outside diameter D and wall thickness T or a set of dimensions covered by option 10) (see Table 7);

- d) the designation of the steel grade in accordance with this Part of EN 10216 (see 5.2);
- e) the test category, except for P620 and P690 (see 9.3).

## 6.2 Options

A number of options are specified in this Part of EN 10216 and these are listed below. In the event that the purchaser does not indicate a wish to implement any of these options at the time of enquiry and order, the tubes shall be supplied in accordance with the basic specification (see 6.1).

- 1) Cold finishing (see 7.2.2);
- 2) restriction on copper and tin content (see Table 2);
- 3) product analysis (see 8.2.2);
- 4) verification of elevated temperature properties of NH-grades (see 8.3.2);
- 5) verification of elevated temperature properties of NL- and QL-grades (see 8.3.2);
- 6) selection of method for verification of leak-tightness (see 8.4.2.1);
- 7) Non-Destructive Testing for test category 2 tubes for detection of transverse imperfections (see 8.4.2.2);
- 8) Non-Destructive Testing for test category 2 tubes for the detection of laminar imperfections (see 8.4.2.2);
- 9) special ends preparation (see 8.6);
- 10) set of dimensions other than D and T (see 8.7.1);
- 11) exact lengths (see 8.7.3);
- 12) the type of inspection certificate 3.2 other than the standard document (see 9.2.1);
- 13) additional verification of impact energy at a temperature different from the standard temperature (see Table 15);
- 14) test pressure for hydrostatic leak-tightness test (see 11.8.1);
- 15) wall thickness measurement away from the ends (see 11.9);
- 16) Non-Destructive Testing method (see 11.11.1);
- 17) additional marking (see 12.2);
- 18) protection (see Clause 13).

## 6.3 Examples of an order

500 m of seamless tube with an outside diameter of 168,3 mm, a wall thickness of 4,5 mm in accordance with EN 10216-3, made of steel grade P355N, test category 1, with a 3.1 inspection certificate in accordance with EN 10204:

EXAMPLE      500 m – Tube – 168,3 x 4,5 – EN 10216-3 – P355N – TC1.

## 7 Manufacturing process

### 7.1 Steelmaking process

The steelmaking process is at the discretion of the manufacturer with the exception that the open hearth (Siemens-Martin) process shall not be employed unless in combination with a secondary steelmaking or ladle refining process.

Steels shall be fully killed.

NOTE This excludes the use of rimming, balanced or semi-killed steel.

### 7.2 Tube manufacture and delivery conditions

**7.2.1** All NDT activities shall be carried out by qualified and competent level 1,2 and/or 3 personnel authorized to operate by the employer.

The qualification shall be in accordance with ISO 11484 or, at least, an equivalent to it.

It is recommended that the level 3 personnel be certified in accordance with EN ISO 9712 or, at least, an equivalent to it.

The operating authorization issued by the employer shall be in accordance with a written procedure.

NDT operations shall be authorized by level 3 NDT individual approved by the employer.

NOTE The definition of level 1, 2 and 3 can be found in appropriate standards, e.g. EN ISO 9712 and ISO 11484.

**7.2.2** The tubes shall be manufactured by a seamless process.

Unless option 1 is specified, the tubes may be either hot or cold finished at the discretion of the manufacturer. The terms " hot finished " and " cold finished " apply to the condition of the tube before it is heat treated in accordance with 7.2.3.

**Option 1:** *The tubes shall be cold finished before heat treatment.*

**7.2.3** The tubes shall be supplied in the relevant heat treatment conditions as specified in Table 1 and Table 4.

**Table 1 — Forming operation and delivery condition**

| Forming operation          | Heat treatment condition  | Symbol for the delivery condition |
|----------------------------|---------------------------|-----------------------------------|
| Hot finished               | Normalized <sup>a b</sup> | +N                                |
|                            | Quenched and tempered     | +QT                               |
| Hot rolled + cold finished | Normalized <sup>b</sup>   | +N                                |
|                            | Quenched and tempered     | +QT                               |
| <sup>a</sup> See 7.2.4.    |                           |                                   |
| <sup>b</sup> See 7.2.5.    |                           |                                   |

**7.2.4** In case of steel grade P355N and P355NH, normalizing may be replaced by normalizing forming.

**7.2.5** For steel grade P460 it may be necessary to apply delayed cooling or additional tempering after normalizing. For N-steel grades, accelerated cooling after austenitising may be necessary in order to achieve the intended structure and material properties in case of wall thickness above 25 mm or T/D > 0,15.



In both cases, the decision shall be left to the discretion of the manufacturer but shall be stated to the customer at the time of enquiry and order. Steel tubes treated with accelerated cooling shall be designated by the steel name supplemented by the symbol "+QT".

## 8 Requirements

### 8.1 General

When supplied in a delivery condition indicated in 7.2 and inspected in accordance with Clauses 9, 10 and 11, the tubes shall conform to with the requirements of this Part of EN 10216.

In addition, the general technical delivery requirements specified in EN 10021 shall apply.

Tubes shall be suitable for hot and cold bending provided the bending is carried out in an appropriate manner.

When tubes are specified in the order by  $d$ ,  $d_{\min}$  or  $T_{\min}$  the following formulae, with all terms in mm, shall apply for the calculation of outside diameter  $D_c$ , inside diameter  $d_c$  and wall thickness  $T_c$ , instead of  $D$ ,  $d$  and  $T$  for the relevant requirements in 7.2.5, 8.4.1.4, 10.2.2.2, 11.3, 11.8.1, 11.9, 11.11.4, 12.1 and Table 1, footnote c, Tables 4, 5, 6, 7, 10, 12, 15 and 16:

$$D_c = d + 2T \quad (1)$$

$$D_c = d_{\min} + \frac{\text{tolerance} \cdot \text{of} \cdot d_{\min}}{2} + 2T \quad (2)$$

$$d_c = d_{\min} + \frac{\text{tolerance} \cdot \text{of} \cdot d_{\min}}{2} \quad (3)$$

$$T_c = T_{\min} + \frac{\text{tolerance} \cdot \text{of} \cdot T_{\min}}{2} \quad (4)$$

For tolerances, see Tables 10, 11 and 12.

### 8.2 Chemical composition

#### 8.2.1 Cast analysis

The cast analysis reported by the steel producer shall apply and conform to the requirements of Table 2.

When welding tubes produced in accordance with this Part of EN 10216, account should be taken of the fact that the behaviour of the steel during and after welding is dependent not only on the steel, but also on the applied heat treatment and the conditions of preparing for and carrying out the welding.

#### 8.2.2 Product analysis

**Option 3:** A product analysis for the tubes shall be supplied.

Table 3 specifies the permissible deviations of the product analysis from the specified limits on cast analysis given in Table 2.

### 8.3 Mechanical properties

**8.3.1** The mechanical properties of the tubes shall conform to the requirements in Tables 4, 5, 6, 7, Annex A, and in 11.3, 11.4, 11.5, 11.6 and 11.7.

**8.3.2** The elevated temperature properties given in Table 5 and Table 6 shall be verified for steel grade P620QH and P690QH at 300 °C.

**Option 4:** *Elevated temperature properties given in Table 5 and Table 6 shall be verified for NH-grades at 400 °C.*

The properties at elevated temperature given in Table 5 and Table 6 for steel grades P355NH, P460NH, P620QH and P690QH, apply for the corresponding low and special low temperature quality steels if option 5 is specified.

The properties at the elevated temperature given in Annex A for steel grades P275NL1 and P275NL2 apply if option 5 is specified.

**Option 5:** *Elevated temperature properties given in Tables 5, 6 and Annex A shall be verified for NL- and QL-grades at the highest temperature for which a value is given.*

Table 2 — Chemical composition (cast analysis)<sup>a</sup>, in % by mass

| Steel grade |              | C    | Si   | Mn           | P     | S     | Cr                | Mo                | Ni   | Al <sup>b</sup> <sub>tot</sub> | Cu                  | N     | Nb   | Ti    | V    | Nb+Ti+V |
|-------------|--------------|------|------|--------------|-------|-------|-------------------|-------------------|------|--------------------------------|---------------------|-------|------|-------|------|---------|
| Steel name  | Steel number | max  | max  |              | max   | max   | max               | max               | max  | min                            | max                 | max   | max  | max   | max  | max     |
| P275NL1     | 1.0488       | 0,16 | 0,40 | 0,50 to 1,50 | 0,025 | 0,008 | 0,30 <sup>c</sup> | 0,08 <sup>c</sup> | 0,50 | 0,020                          | 0,30 <sup>c,d</sup> | 0,020 | 0,05 | 0,040 | 0,05 | 0,05    |
| P275NL2     | 1.1104       |      |      |              |       | 0,005 |                   |                   |      |                                |                     |       |      |       |      |         |
| P355N       | 1.0562       | 0,20 | 0,50 | 0,90 to 1,70 | 0,025 | 0,020 | 0,30 <sup>c</sup> | 0,08 <sup>c</sup> | 0,50 | 0,020                          | 0,30 <sup>c,d</sup> | 0,020 | 0,05 | 0,040 | 0,10 | 0,12    |
| P355NH      | 1.0565       |      |      |              |       | 0,010 |                   |                   |      |                                |                     |       |      |       |      |         |
| P355NL1     | 1.0566       | 0,18 |      |              |       | 0,008 |                   |                   |      |                                |                     |       |      |       |      |         |
| P355NL2     | 1.1106       |      |      |              |       | 0,005 |                   |                   |      |                                |                     |       |      |       |      |         |
| P460N       | 1.8905       | 0,20 | 0,60 | 1,00 to 1,70 | 0,025 | 0,020 | 0,30              | 0,10              | 0,80 | 0,020                          | 0,70 <sup>e</sup>   | 0,020 | 0,05 | 0,040 | 0,20 | 0,22    |
| P460NH      | 1.8935       |      |      |              |       | 0,010 |                   |                   |      |                                |                     |       |      |       |      |         |
| P460 NL1    | 1.8915       |      |      |              |       | 0,008 |                   |                   |      |                                |                     |       |      |       |      |         |
| P460NL2     | 1.8918       |      |      |              |       | 0,005 |                   |                   |      |                                |                     |       |      |       |      |         |
| P620Q       | 1.8876       | 0,20 | 060  | 1,00 to1,70  | 0,025 | 0,020 | 0,30              | 0,10              | 0,80 | 0,020                          | 0,30 <sup>d</sup>   | 0,020 | 0,05 | 0,040 | 0,20 | 0,22    |
| P620QH      | 1.8877       |      |      |              |       | 0,015 |                   |                   |      |                                |                     |       |      |       |      |         |
| P620QL      | 1.8890       | 0,20 | 0,80 | 1,20 to 1,70 | 0,025 | 0,015 | 1,50              | 0,70              | 2,50 | 0,020                          | 0,30 <sup>d</sup>   | 0,015 | 0,06 | 0,05  | 0,12 |         |
| P690Q       | 1.8879       |      |      |              |       |       |                   |                   |      |                                |                     |       |      |       |      |         |
| P690QH      | 1.8880       |      |      |              |       |       |                   |                   |      |                                |                     |       |      |       |      |         |
| P690QL1     | 1.8881       |      |      |              |       |       |                   |                   |      |                                |                     |       |      |       |      |         |
| P690QL2     | 1.8888       |      |      |              | 0,020 | 0,010 |                   |                   |      |                                |                     |       |      |       |      |         |

<sup>a</sup> Elements not included in this table shall not be intentionally added to the steel without the agreement of the purchaser, except for elements which may be added for finishing the cast. All appropriate measures shall be taken to prevent the addition of undesirable elements from scrap or other materials used in the steel making process.

<sup>b</sup> Al/N  $\geq 2$ , if nitrogen is fixed by niobium, titanium or vanadium the requirements for Al<sub>tot</sub> and Al/N do not apply.

<sup>c</sup> The sum of the percentage by mass of the three elements chromium, copper and molybdenum shall not exceed 0,45 %.

<sup>d</sup> **Option 2:** In order to facilitate subsequent forming operation, an agreed maximum copper content lower than indicated and an agreed specified maximum tin content shall apply.

<sup>e</sup> If the percentage by mass of copper exceeds 0,30 %, the percentage by mass of nickel shall be at least half the percentage by mass of copper.



Table 3 — Permissible deviations of the product analysis from specified limits on cast analysis given in Table 2

| Element | Limiting value for the cast analysis in accordance with Table 2<br>% by mass | Permissible deviation of the product analysis<br>% by mass |
|---------|------------------------------------------------------------------------------|------------------------------------------------------------|
| C       | $\leq 0,20$                                                                  | + 0,02                                                     |
| Si      | $\leq 0,40$                                                                  | + 0,05                                                     |
|         | > 0,40 to 0,80                                                               | + 0,06                                                     |
| Mn      | $\leq 1,70$                                                                  | + 0,10<br>- 0,05                                           |
| P       | $\leq 0,025$                                                                 | + 0,005                                                    |
| S       | $\leq 0,015$                                                                 | + 0,003                                                    |
|         | > 0,015 to $\leq 0,020$                                                      | + 0,005                                                    |
| Al      | $\geq 0,020$                                                                 | - 0,005                                                    |
| Cr      | $\leq 0,30$                                                                  | + 0,05                                                     |
|         | > 0,30 to $\leq 1,50$                                                        | + 0,10                                                     |
| Cu      | $\leq 0,70$                                                                  | + 0,05                                                     |
| Mo      | $\leq 0,35$                                                                  | + 0,03                                                     |
|         | > 0,35 to $\leq 0,70$                                                        | + 0,04                                                     |
| N       | $\leq 0,020$                                                                 | + 0,002                                                    |
| Nb      | $\leq 0,06$                                                                  | + 0,005                                                    |
| Ni      | $\leq 2,50$                                                                  | + 0,05                                                     |
| Ti      | $\leq 0,05$                                                                  | + 0,01                                                     |
| V       | $\leq 0,10$                                                                  | + 0,01                                                     |
|         | > 0,10 to $\leq 0,20$                                                        | + 0,02                                                     |

Table 4 — Mechanical properties at room temperature

| Steel grade |              | Heat Treatment condition | Tensile properties                                                                                     |                           |                           |                           |                           |                                                         |                            |            |                                      |            |    |    |
|-------------|--------------|--------------------------|--------------------------------------------------------------------------------------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------------------------------------|----------------------------|------------|--------------------------------------|------------|----|----|
| Steel name  | Steel number |                          | Upper yield strength or proof strength<br>$R_{eH}$ or $R_{p0.2}$<br>min.<br>for wall thickness T in mm |                           |                           |                           |                           | Tensile strength<br>$R_m$<br>for wall thickness T in mm |                            |            | Elongation <sup>a</sup><br>A<br>min. |            |    |    |
|             |              |                          | $\leq 12$                                                                                              | $> 12$<br>to<br>$\leq 20$ | $> 20$<br>to<br>$\leq 40$ | $> 40$<br>to<br>$\leq 50$ | $> 50$<br>to<br>$\leq 65$ | $> 65$<br>to<br>$\leq 80$                               | $> 80$<br>to<br>$\leq 100$ |            |                                      |            |    |    |
|             |              |                          | MPa *                                                                                                  |                           |                           |                           |                           | MPa *                                                   |                            |            | %                                    |            |    |    |
| P 275 NL 1  | 1.0488       | +N                       |                                                                                                        | 275                       |                           | 265                       | 255                       | 245                                                     | 235                        | 390 to 530 | 390 to 510                           | 360 to 480 | 24 | 22 |
| P 275 NL 2  | 1.1104       |                          |                                                                                                        |                           |                           |                           |                           |                                                         |                            |            |                                      |            |    |    |
| P 355 N     | 1.0562       | +N <sup>b</sup>          |                                                                                                        |                           | 345                       | 335                       | 325                       | 315                                                     | 305                        | 490 to 650 | 490 to 630                           | 450 to 590 | 22 | 20 |
| P 355 NH    | 1.0565       |                          |                                                                                                        |                           |                           |                           |                           |                                                         |                            |            |                                      |            |    |    |
| P 355 NL 1  | 1.0566       | +N                       |                                                                                                        |                           |                           |                           |                           |                                                         |                            |            |                                      |            |    |    |
| P 355 NL 2  | 1.1106       |                          |                                                                                                        |                           |                           |                           |                           |                                                         |                            |            |                                      |            |    |    |
| P 460 N     | 1.8905       | +N <sup>c</sup>          |                                                                                                        |                           |                           | 425                       | 410                       | 400                                                     | 390                        | 560 to 730 |                                      | 490 to 690 | 19 | 17 |
| P 460 NH    | 1.8935       |                          |                                                                                                        |                           |                           |                           |                           |                                                         |                            |            |                                      |            |    |    |
| P 460 NL 1  | 1.8915       |                          |                                                                                                        |                           |                           |                           |                           |                                                         |                            |            |                                      |            |    |    |
| P 460 NL 2  | 1.8918       |                          |                                                                                                        |                           |                           |                           |                           |                                                         |                            |            |                                      |            |    |    |
| P 620 Q     | 1.8876       | +QT                      |                                                                                                        |                           | 580                       | 540                       | 500                       | -                                                       | -                          | 740 to 930 | 690 to 860                           | 630 to 800 | 16 | 14 |
| P 620 QH    | 1.8877       |                          |                                                                                                        |                           |                           |                           |                           |                                                         |                            |            |                                      |            |    |    |
| P 620 QL    | 1.8890       |                          |                                                                                                        |                           |                           |                           |                           |                                                         |                            |            |                                      |            |    |    |
| P 690 Q     | 1.8879       |                          |                                                                                                        |                           |                           |                           |                           |                                                         |                            |            |                                      |            |    |    |
| P 690 QH    | 1.8880       |                          |                                                                                                        |                           | 650                       | 615                       | 580                       | 540                                                     | 500                        | 770 to 960 | 720 to 900                           | 620 to 800 |    |    |
| P 690 QL 1  | 1.8881       |                          |                                                                                                        |                           |                           |                           |                           |                                                         |                            |            |                                      |            |    |    |
| P 690 QL 2  | 1.8888       |                          |                                                                                                        |                           | 690                       | 650                       | 615                       | 580                                                     | 540                        | 770 to 960 |                                      | 680 to 860 |    |    |

<sup>a</sup> l = longitudinal; t = transverse.

<sup>b</sup> See 7.2.4.

<sup>c</sup> See 7.2.5.

\* 1 MPa = 1 N/mm<sup>2</sup>

<sup>a</sup> l = longitudinal; t = transverse.<sup>b</sup> See 7.2.4.<sup>c</sup> See 7.2.5.\* 1 MPa = 1 N/mm<sup>2</sup>

Table 5 — Minimum 0,2 %-proof strength ( $R_{p0,2}$ ) at elevated temperature <sup>a</sup>

| Steel grade |              | Wall thickness<br>T<br>mm | $R_{p0,2}$ minimum<br>MPa *<br>at a temperature of °C |     |     |     |     |     |     |  |  |  |
|-------------|--------------|---------------------------|-------------------------------------------------------|-----|-----|-----|-----|-----|-----|--|--|--|
| Steel name  | Steel number |                           | 100                                                   | 150 | 200 | 250 | 300 | 350 | 400 |  |  |  |
| P355 NH     | 1.0565       | ≤ 20                      | 304                                                   | 284 | 255 | 235 | 216 | 196 | 167 |  |  |  |
|             |              | > 20 to ≤ 50              | 294                                                   | 275 | 255 | 235 | 216 | 196 | 167 |  |  |  |
|             |              | > 50 to ≤ 65              | 284                                                   | 265 | 245 | 226 | 206 | 186 | 157 |  |  |  |
|             |              | > 65 to ≤ 80              | 275                                                   | 255 | 235 | 216 | 196 | 177 | 147 |  |  |  |
|             |              | > 80 to ≤ 100             | 265                                                   | 245 | 226 | 206 | 186 | 167 | 137 |  |  |  |
| P460NH      | 1.8935       | ≤ 12                      | 402                                                   | 373 | 343 | 314 | 294 | 265 | 235 |  |  |  |
|             |              | > 12 to ≤ 20              | 392                                                   | 363 | 343 | 314 | 294 | 265 | 235 |  |  |  |
|             |              | > 20 to ≤ 50              | 382                                                   | 353 | 333 | 304 | 284 | 255 | 226 |  |  |  |
|             |              | > 50 to ≤ 65              | 373                                                   | 343 | 324 | 294 | 275 | 245 | 216 |  |  |  |
|             |              | > 65 to ≤ 80              | 363                                                   | 333 | 314 | 284 | 265 | 235 | 206 |  |  |  |
| P620QH      | 1.8877       | > 80 to ≤ 100             | 353                                                   | 324 | 304 | 275 | 255 | 226 | 196 |  |  |  |
|             |              | ≤ 20                      | 490                                                   | 480 | 470 | 460 | 450 | --  | --  |  |  |  |
|             |              | > 20 to ≤ 40              | 470                                                   | 460 | 450 | 440 | 430 | --  | --  |  |  |  |
|             |              | > 40 to ≤ 65              | 430                                                   | 420 | 410 | 400 | 390 | --  | --  |  |  |  |
|             |              | ≤ 20                      | 590                                                   | 580 | 570 | 560 | 550 | --  | --  |  |  |  |
| P690QH      | 1.8880       | > 20 to ≤ 40              | 550                                                   | 540 | 530 | 520 | 510 | --  | --  |  |  |  |
|             |              | > 40 to ≤ 65              | 510                                                   | 500 | 490 | 480 | 470 | --  | --  |  |  |  |
|             |              | > 65 to ≤ 80              | 490                                                   | 480 | 470 | 460 | 450 | --  | --  |  |  |  |
|             |              | > 80 to ≤ 100             | 450                                                   | 440 | 430 | 420 | 410 | --  | --  |  |  |  |
|             |              |                           |                                                       |     |     |     |     |     |     |  |  |  |

<sup>a</sup> See 8.3.2.\* 1 MPa = 1 N/mm<sup>2</sup>.

Table 6 — Minimum tensile strength R<sub>m</sub> at elevated temperature <sup>a</sup>

| Steel grade |              | Wall thickness | R <sub>m</sub> minimum<br>MPa * |     |     |     |     |     |     |  |  |  |
|-------------|--------------|----------------|---------------------------------|-----|-----|-----|-----|-----|-----|--|--|--|
| Steel name  | Steel number | T<br>mm        | at a temperature of °C          |     |     |     |     |     |     |  |  |  |
| P355 NH     | 1.0565       | ≤ 30           | 100                             | 150 | 200 | 250 | 300 | 350 | 400 |  |  |  |
|             |              | > 30 to ≤ 50   | 440                             | 430 | 410 | 410 | 410 | 400 | 390 |  |  |  |
|             |              |                | 420                             | 410 | 390 | 390 | 390 | 380 | 370 |  |  |  |
|             |              | > 50 to ≤ 80   | 400                             | 390 | 370 | 370 | 370 | 360 | 350 |  |  |  |
| P460NH      | 1.8935       | > 80 to ≤ 100  | 390                             | 380 | 360 | 360 | 360 | 350 | 340 |  |  |  |
|             |              | ≤30            | 510                             | 490 | 480 | 480 | 480 | 470 | 460 |  |  |  |
|             |              | > 30 to ≤ 50   | 490                             | 470 | 460 | 460 | 460 | 450 | 440 |  |  |  |
|             |              | > 50 to ≤ 80   | 480                             | 460 | 450 | 450 | 450 | 440 | 430 |  |  |  |
| P620QH      | 1.8877       | > 80 to ≤ 100  | 470                             | 450 | 440 | 440 | 440 | 430 | 420 |  |  |  |
|             |              | ≤ 20           | 640                             | 620 | 600 | 600 | 600 | --  | --  |  |  |  |
|             |              | > 20 to ≤ 40   | 600                             | 580 | 560 | 560 | 560 | --  | --  |  |  |  |
|             |              | > 40 to ≤ 65   | 540                             | 520 | 500 | 500 | 500 | --  | --  |  |  |  |
| P690QH      | 1.8880       | ≤ 20           | 710                             | 690 | 670 | 670 | 670 | --  | --  |  |  |  |
|             |              | > 20 to ≤ 40   | 660                             | 640 | 620 | 620 | 620 | --  | --  |  |  |  |
|             |              | > 40 to ≤80    | 610                             | 590 | 570 | 570 | 570 | --  | --  |  |  |  |
|             |              | > 80 to ≤ 100  | 580                             | 560 | 540 | 540 | 540 | --  | --  |  |  |  |

<sup>a</sup> See 8.3.2.  
\* 1 MPa = 1 N/mm<sup>2</sup>.

<sup>a</sup> See 8.3.2.\* 1 MPa = 1 N/mm<sup>2</sup>.



Table 7 — Minimum impact energy

| Steel grades                                       |                                                | Wall thickness<br><br>T<br><br>mm | Minimum average impact energy KV <sub>2</sub> J for |      |      |      |      |    |      |      |      |                      |      |      |    |      |  |
|----------------------------------------------------|------------------------------------------------|-----------------------------------|-----------------------------------------------------|------|------|------|------|----|------|------|------|----------------------|------|------|----|------|--|
|                                                    |                                                |                                   | longitudinal direction                              |      |      |      |      |    |      |      |      | transverse direction |      |      |    |      |  |
|                                                    |                                                |                                   | at a temperature of °C                              |      |      |      |      |    |      |      |      |                      |      |      |    |      |  |
| Steel name                                         | Steel number                                   |                                   | - 50                                                | - 40 | - 30 | - 20 | - 10 | 0  | + 20 | - 50 | - 40 | - 30                 | - 20 | - 10 | 0  | + 20 |  |
| P355N<br>P355NH<br>P460N<br>P460NH                 | 1.0562<br>1.0565<br>1.8905<br>1.8935           | ≤ 40                              | -                                                   | -    | -    | 40   | 43   | 47 | 55   | -    | -    | -                    | 27   | 31   | 35 | 39   |  |
| P620Q<br>P620QH<br>P690Q<br>P690QH                 | 1.8876<br>1.8877<br>1.8879<br>1.8880           | > 40 to ≤ 65                      | -                                                   | -    | -    | -    | 40   | 45 | 50   | -    | -    | -                    | -    | 27   | 31 | 35   |  |
| P275NL1<br>P355NL1<br>P460NL1<br>P620QL<br>P690QL1 | 1.0488<br>1.0566<br>1.8915<br>1.8890<br>1.8881 | ≤ 40<br><br><br>> 40 to ≤ 65      | -                                                   | 40   | 47   | 53   | 60   | 65 | 70   | -    | 27   | 31                   | 35   | 39   | 43 | 47   |  |
| P275NL2<br>P355NL2<br>P460NL2<br>P690QL2           | 1.1104<br>1.1106<br>1.8918<br>1.8888           | ≤ 40<br><br>> 40 to ≤ 65          | 40                                                  | 50   | 60   | 70   | 80   | 90 | 100  | 27   | 33   | 40                   | 47   | 53   | 60 | 70   |  |
|                                                    |                                                |                                   | -                                                   | 40   | 50   | 60   | 70   | 80 | 90   | -    | 27   | 33                   | 40   | 47   | 53 | 60   |  |

## 8.4 Appearance and internal soundness

### 8.4.1 Appearance

**8.4.1.1** The tubes shall be free from external and internal surface defects that can be detected by visual examination.

**8.4.1.2** The internal and external surface finish of the tubes shall be typical of the manufacturing process and, where applicable, the heat treatment employed. Normally the finish and surface condition shall be such that any surface imperfections requiring dressing can be identified.

**8.4.1.3** It shall be permissible to dress, only by grinding or machining, surface imperfections provided that, after doing so, the wall thickness in the dressed area is not less than the specified minimum wall thickness. All dressed areas shall blend smoothly into the contour of the tube.

**8.4.1.4** Any surface imperfection, which is demonstrated to be deeper than 5 % of the wall thickness  $T$  or 3 mm, whichever is the smaller, shall be dressed.

This requirement does not apply to surface imperfection with a depth equal or less than 0,3 mm.

**8.4.1.5** Surface imperfections which encroach on the specified minimum wall thickness shall be considered defects and tubes containing these shall be deemed not to comply with this Part EN 10216.

### 8.4.2 Internal soundness

#### 8.4.2.1 Leak-tightness

The tubes shall pass a hydrostatic test (see 11.8.1) or electromagnetic test (see 11.8.2) for leak tightness.

Unless option 6 is specified, the choice of the test method is at the discretion of the manufacturer.

**Option 6:** *The test method for verification of leak-tightness in accordance with 11.8.1 or 11.8.2 is specified by the purchaser.*

#### 8.4.2.2 Non-Destructive testing

The tubes of test category 2 shall be subjected to a Non-Destructive testing for the detection of longitudinal imperfections, in accordance with 11.11.1.

**Option 7:** *The tubes of test category 2 shall be subjected to a Non-Destructive testing for the detection of transverse imperfections in accordance with 11.11.2.*

**Option 8:** *The tubes of test category 2 shall be subjected to a Non-Destructive testing for the detection of the laminar imperfections in accordance with 11.11.3.*


## 8.5 Straightness

The deviation from straightness of any tube length  $L$  shall not exceed  $0,001\ 5\ L$ . Deviations from straightness over any one metre length shall not exceed 3 mm.

## 8.6 Preparation of ends

Tubes shall be delivered with square cut ends. The ends shall be free from excessive burrs.

**Option 9:** *The tubes with wall thickness  $\geq 3.2\text{ mm}$  shall be delivered with bevelled ends (see Figure 1). The bevel shall have an angle  $\alpha$  of  $30^\circ \substack{+5^\circ \\ 0^\circ}$  with a root face  $C$  of  $1,6\text{ mm} \pm 0,8\text{ mm}$ , except that for wall thickness  $T$  greater than 20 mm, an alternative bevel may be specified.*

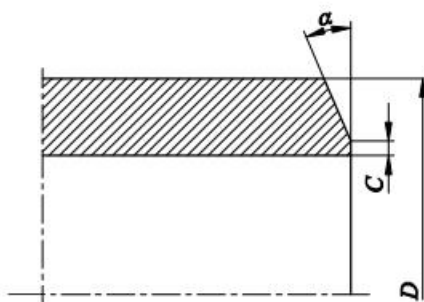

**Key:**

- $D$  outside diameter
- $\alpha$  bevel angle
- $C$  root face of bevelled end

**Figure 1 — Tube end bevel end**

## 8.7 Dimensions, masses and tolerances

### 8.7.1 Diameter and wall thickness

Unless option 10 is specified, tubes shall be delivered by outside diameter  $D$  and wall thickness  $T$ .

Preferred outside diameters  $D$  and wall thicknesses  $T$  have been selected from EN 10220 and are given in Table 8.

Dimensions which are different from those in Table 8 may be agreed.

**Option 10:** *The tubes shall be delivered to one of the following sets of dimensions as specified at the time of enquiry and order:*

- outside diameter  $D$  and minimum wall thickness  $T_{\min}$ ;
- inside diameter  $d$  and wall thickness  $T$  for  $d \geq 220$  mm;
- inside diameter  $d$  and minimum wall thickness  $T_{\min}$  for  $d \geq 220$  mm;
- minimum inside diameter  $d_{\min}$  and wall thickness  $T$  for  $d_{\min} \geq 220$  mm;
- minimum inside diameter  $d_{\min}$  and minimum wall thickness  $T_{\min}$  for  $d_{\min} \geq 220$  mm.

Table 8 — Preferred dimensions

Dimensions in millimetres

| Outside diameter<br><i>D</i><br>Series <sup>a</sup> |       |       | Wall thickness<br><i>T</i> |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|-----------------------------------------------------|-------|-------|----------------------------|-----|---|-----|-----|-----|-----|-----|---|-----|---|-----|-----|-----|---|-----|----|----|------|------|
| 1                                                   | 2     | 3     | 1,6                        | 1,8 | 2 | 2,3 | 2,6 | 2,9 | 3,2 | 3,6 | 4 | 4,5 | 5 | 5,6 | 6,3 | 7,1 | 8 | 8,8 | 10 | 11 | 12,5 | 14,2 |
| 10,2                                                |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     | 12    |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     | 12,7  |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
| 13,5                                                |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     |       | 14    |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     | 16    |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
| 17,2                                                |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     |       | 18    |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     | 19    |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     | 20    |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
| 21,3                                                |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     |       | 22    |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     | 25    |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     |       | 25,4  |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
| 26,9                                                |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     |       | 30    |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     | 31,8  |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     | 32    |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
| 33,7                                                |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     |       | 35    |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     | 38    |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     | 40    |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
| 42,4                                                |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     |       | 44,5  |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
| 48,3                                                |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     | 51    |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     |       | 54    |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     | 57    |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
| 60,3                                                |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     | 63,5  |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     | 70    |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     |       | 73    |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
| 76,1                                                |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     |       | 82,5  |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
| 88,9                                                |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     | 101,6 |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     |       | 108   |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
| 114,3                                               |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     | 127   |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     | 133   |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
| 139,7                                               |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     |       | 141,3 |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     |       | 152,4 |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     |       | 159   |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
| 168,3                                               |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     |       | 177,8 |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     |       | 193,7 |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
| 219,1                                               |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     |       | 244,5 |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
| 273                                                 |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
| 323,9                                               |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
| 355,6                                               |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
| 406,4                                               |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
| 457                                                 |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
| 508                                                 |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     |       | 559   |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
| 610                                                 |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
|                                                     |       | 660   |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |
| 711                                                 |       |       |                            |     |   |     |     |     |     |     |   |     |   |     |     |     |   |     |    |    |      |      |



Table 8 (continued)

| Outside diameter<br><i>D</i><br>series <sup>a</sup> |       |       | Wall thickness<br><i>T</i> |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|-----------------------------------------------------|-------|-------|----------------------------|------|----|------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-----|
| 1                                                   | 2     | 3     | 16                         | 17,5 | 20 | 22,2 | 25 | 28 | 30 | 32 | 36 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 80 | 90 | 100 |
| 10,2                                                |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     | 12    |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     | 12,7  |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
| 13,5                                                |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     |       | 14    |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     | 16    |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
| 17,2                                                |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     |       | 18    |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     | 19    |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     | 20    |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
| 21,3                                                |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     |       | 22    |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     | 25    |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     |       | 25,4  |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
| 26,9                                                |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     |       | 30    |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     | 31,8  |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     | 32    |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
| 33,7                                                |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     |       | 35    |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     | 38    |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     | 40    |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
| 42,4                                                |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     |       | 44,5  |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
| 48,3                                                |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     | 51    |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     |       | 54    |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     | 57    |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
| 60,3                                                |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     | 63,5  |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     | 70    |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     |       | 73    |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
| 76,1                                                |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     |       | 82,5  |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
| 88,9                                                |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     | 101,6 |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     |       | 108   |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
| 114,3                                               |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     | 127   |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     | 133   |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
| 139,7                                               |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     |       | 141,3 |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     |       | 152,4 |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     |       | 159   |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
| 168,3                                               |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     |       | 177,8 |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     |       | 193,7 |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
| 219,1                                               |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     |       | 244,5 |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
| 273                                                 |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
| 323,9                                               |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
| 355,6                                               |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
| 406,4                                               |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
| 457                                                 |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
| 508                                                 |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     |       | 559   |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
| 610                                                 |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
|                                                     |       | 660   |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |
| 711                                                 |       |       |                            |      |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |     |

<sup>a</sup> series 1 = diameter for which all the accessories needed for the construction of piping system are standardized;  
series 2 = diameter for which not all the accessories are standardized;  
series 3 = diameter for special application for which very few standardized accessories exist.

## 8.7.2 Mass

For the mass per unit length, the provisions of EN 10220 apply.

## 8.7.3 Lengths

Unless option 11 is specified, the tubes shall be delivered in random length. The delivery range shall be agreed at the time of enquiry and order.

**Option 11:** The tubes shall be delivered in exact length and the length shall be specified at the time of enquiry and order. For tolerances, see 8.7.4.2.

## 8.7.4 Tolerances

### 8.7.4.1 Tolerances on diameter and thickness

The diameter and the wall thickness of the tubes shall be within the relevant tolerance limits given in Tables 9, 10, 11, 12 or 13.

Out of roundness is included in the tolerances on diameter and eccentricity is included in the tolerances on wall thickness.

**Table 9 — Tolerances on outside diameter and wall thickness**

| Outside diameter<br>$D$<br>mm | Tolerances on<br>$D$       | Tolerances on $T$ for a $T/D$ ratio                    |                           |                          |                          |
|-------------------------------|----------------------------|--------------------------------------------------------|---------------------------|--------------------------|--------------------------|
|                               |                            | $\leq 0,025$                                           | $> 0,025$<br>$\leq 0,050$ | $> 0,050$<br>$\leq 0,10$ | $> 0,10$                 |
| $D \leq 219,1$                | $\pm 1 \%$ or $\pm 0,5$ mm | $\pm 12,5 \%$ or $\pm 0,4$ mm whichever is the greater |                           |                          |                          |
| $D > 219,1$                   | whichever is the greater   | $\pm 20 \%$                                            | $\pm 15 \%$               | $\pm 12,5 \%$            | $\pm 10 \%$ <sup>a</sup> |

<sup>a</sup> For outside diameters  $D \geq 355,6$  mm, it is permitted to exceed the upper wall thickness locally by a further 5 % of the wall thickness  $T$ .

**Table 10 — Tolerances on inside diameter and on wall thickness**

| Tolerances on inside diameter                                   |               |    |                       | Tolerances on $T$ for a $T/d$ ratio |                         |                         |               |                          |
|-----------------------------------------------------------------|---------------|----|-----------------------|-------------------------------------|-------------------------|-------------------------|---------------|--------------------------|
| $d$                                                             | $d_{min}$     |    |                       | $\leq 0,03$                         | $> 0,03$<br>$\leq 0,06$ | $> 0,06$<br>$\leq 0,12$ | $> 0,12$      |                          |
| $\pm 1 \%$ or $\pm 2 \text{ mm}$<br>whichever is the<br>greater | $+ 2 \%$<br>0 | or | $+ 4 \text{ mm}$<br>0 | whichever is the<br>greater         | $\pm 20 \%$             | $\pm 15 \%$             | $\pm 12,5 \%$ | $\pm 10 \%$ <sup>a</sup> |

<sup>a</sup> For outside diameters  $D \geq 355,6 \text{ mm}$ , it is permitted to exceed the upper wall thickness locally by a further 5 % of the wall thickness  $T$ .

**Table 11 — Tolerances on outside diameter and minimum wall thickness**

| Outside diameter<br>$D$<br>mm | Tolerances on<br>$D$       | Tolerances on $T_{min}$ for a $T_{min}/D$ ratio |                         |                          |                          |
|-------------------------------|----------------------------|-------------------------------------------------|-------------------------|--------------------------|--------------------------|
|                               |                            | $\leq 0,02$                                     | $> 0,02$<br>$\leq 0,04$ | $> 0,04$<br>$\leq 0,09$  | $> 0,09$                 |
| $D \leq 219,1$                | $\pm 1 \%$ or $\pm 0,5$ mm | + 28 %<br>0                                     | or + 0,8 mm<br>0        | whichever is the greater |                          |
| $D > 219,1$                   | whichever is the greater   | + 50 %<br>0                                     | + 35 %<br>0             | + 28 %<br>0              | + 22 % <sup>a</sup><br>0 |

<sup>a</sup> For outside diameters  $D \geq 355,6$  mm, it is permitted to exceed the upper wall thickness locally by a further 5 % of the wall thickness  $T$ .

**Table 12 — Tolerances on inside diameter and minimum wall thickness**

| Tolerances on inside diameter                                |           |    |             | Tolerances on $T_{min}$ for a $T_{min}/d$ ratio |                        |             |                          |
|--------------------------------------------------------------|-----------|----|-------------|-------------------------------------------------|------------------------|-------------|--------------------------|
| $d$                                                          | $d_{min}$ |    |             | $\leq 0,05$                                     | $> 0,05$<br>$\leq 0,1$ | $> 0,1$     |                          |
| $\pm 1 \%$ or $\pm 2 \text{ mm}$<br>whichever is the greater | +2 %<br>0 | or | + 4 mm<br>0 | whichever is the<br>greater                     | + 35 %<br>0            | + 28 %<br>0 | + 22 % <sup>a</sup><br>0 |

<sup>a</sup> For outside diameters  $D \geq 355,6 \text{ mm}$ , it is permitted to exceed the upper wall thickness locally by a further 5 % of the wall thickness  $T$ .

**Table 13 — Tolerances on outside diameter and wall thickness for tube ordered cold finished**

| Tolerance on $D$                                      | Tolerance on $T$                                     |
|-------------------------------------------------------|------------------------------------------------------|
| $\pm 0,5 \%$ or $\pm 0,3$ mm whichever is the greater | $\pm 10 \%$ or $\pm 0,2$ mm whichever is the greater |

#### 8.7.4.2 Tolerances on exact lengths

The tolerances for exact lengths shall be as given in Table 14.

**Table 14 — Tolerances on exact lengths**

Dimensions in millimetres

| Length $L$                | Tolerance on exact length |
|---------------------------|---------------------------|
| $2\,000 < L \leq 6\,000$  | +10<br>0                  |
| $6\,000 < L \leq 12\,000$ | +15<br>0                  |
| $L > 12\,000$             | + by agreement<br>0       |

## 9 Inspection

### 9.1 Types of inspection

Conformity to the requirements of the order, for tubes in accordance with this Part of EN 10216, shall be checked by specific inspection.



When an inspection certificate 3.1 is specified, the material manufacturer shall state in the confirmation of the order whether he is operating according to a "quality-assurance system", certified by a competent Body established within the Community and having undergone a specific assessment for materials.

NOTE See the EU Directive 97/23/EC, Annex I, section 4.3 third paragraph and for further information the Guidelines of the EU Commission and the Member States for its interpretation (see e.g. Guidelines 7/2 and 7/16).

## 9.2 Inspection documents

### 9.2.1 Types of inspection documents

Unless option 12 is specified, an inspection certificate 3.1 in accordance with EN 10204, shall be issued.

**Option 12:** *Inspection certificate 3.2 in accordance with EN 10204 shall be issued.*

If an inspection certificate 3.2 is specified, the purchaser shall notify the manufacturer of the name and address of the organization or person who is to carry out the inspection and produce the inspection document. Additionally, it shall be agreed which party shall issue the certificate.

Inspection certificates 3.1 and 3.2 are to be validated by manufacturer's authorized representative.

### 9.2.2 Content of inspection documents

The content of the inspection document shall be in accordance with EN 10168.

In all types of inspection documents, a statement on the conformity of the products delivered with the requirements of this specification and the order shall be included.

The inspection certificate shall contain the following codes and information:

- A commercial transactions and parties involved;
- B description of products to which the inspection document applies;
- C02-C03 direction of the test pieces and testing temperature;
- C10-C13 tensile test;
- C40-C43 impact test, if applicable;
- C60-C69 other tests;
- C71-C92 chemical composition on cast analysis (product analysis, if applicable);
- D01 marking and identification, surface appearance, shape and dimensional properties;
- D02-D99 leak-tightness test; NDT, material identification, if applicable;
- Z validation.

In addition to the inspection document 3.1 the manufacturer shall state the references to the certificate (see 9.1) of the appropriate "quality-assurance system", if applicable.

## 9.3 Summary of inspection and verification testing

The tubes shall be inspected and tested in test category 1 or test category 2 as specified in the order, except that P620 and P690 shall be tested to test category 2 (see 6.1).

Inspection and testing to be carried out are summarized in Table 15.



Table 15 — Summary of inspection and verification testing

| Type of inspection and test |                                                                                                      | Frequency of testing                           | Refer to          | Test category |   |
|-----------------------------|------------------------------------------------------------------------------------------------------|------------------------------------------------|-------------------|---------------|---|
|                             |                                                                                                      |                                                |                   | 1             | 2 |
| Mandatory tests             | Cast analysis                                                                                        | one per cast                                   | 8.2.1 - 11.1      | X             | X |
|                             | Tensile test at ambient temperature                                                                  | one per sample tube                            | 8.3.1 - 11.2.1    | X             | X |
|                             | Tensile test at elevated temperature (QH grades)                                                     |                                                | 8.3.2 - 11.2.2    | X             | X |
|                             | Flattening test for $D < 600$ mm and $T/D$ ratio $\leq 0,15$ but $T \leq 40$ mm<br>or <sup>a b</sup> |                                                | 8.3 - 11.3 - 11.4 | X             | X |
|                             | Ring tensile test for $D > 150$ mm and $T \leq 40$ mm                                                |                                                | 8.3 - 11.5 - 11.6 | X             | X |
|                             | Drift expanding test for $D \leq 150$ mm and $T \leq 10$ mm<br>or <sup>a b</sup>                     |                                                |                   |               |   |
|                             | Ring expanding test for $D \leq 114,3$ mm and $T \leq 12,5$ mm                                       |                                                | 8.3 - 11.7        | X             | X |
|                             | Impact test <sup>c</sup>                                                                             | each tube                                      | 8.4.2.1 - 11.8    | X             | X |
|                             | Leak tightness test                                                                                  |                                                | 8.7 - 11.9        | X             | X |
|                             | Dimensional inspection                                                                               |                                                | 11.10             | X             | X |
|                             | Visual examination                                                                                   |                                                | 8.4.2.2 - 11.11.1 | —             | X |
|                             | NDT for the detection of longitudinal imperfections                                                  |                                                | 11.12             | X             | X |
|                             | Material identification                                                                              |                                                |                   |               |   |
| Optional tests              | Product analysis (Option 3)                                                                          | one per cast                                   | 8.2.2 - 11.1      | X             | X |
|                             | Tensile test at elevated temperature (NH,NL, QL-grades) (Options 4 or 5)                             | one per cast and same heat treatment condition | 8.3 - 11.2.2      | X             | X |
|                             | Impact test at temperature other than standard test temperature (Option 13)                          | one per sample tube                            | 11.7              | X             | X |
|                             | Wall thickness measurement away from tube ends (Option 15)                                           | see 11.9                                       |                   | X             | X |
|                             | NDT for the detection of transverse imperfections (Option 7)                                         | each tube                                      | 11.11.2           | —             | X |
|                             | NDT for the detection of laminar imperfections (Option 8)                                            |                                                | 11.11.3           | —             | X |

<sup>a</sup> The choice of flattening test or ring tensile test and of drift expanding test or ring expanding test is at the manufacturer's discretion.

<sup>b</sup> Tests not applicable for steel grades P620 and P690.

<sup>c</sup> **Option 13:** Additional to the testing at standard test temperature the impact test shall be performed at a temperature selected from those given in Table 7 for the relevant steel grade.

## 10 Sampling

### 10.1 Frequency of tests

#### 10.1.1 Test unit

For normalized formed tubes, a test unit shall comprise tubes of the same specified diameter and wall thickness, the same steel grade, the same cast, the same manufacturing process.

For tubes which are furnace heat treated, a test unit shall comprise tubes of the same specified diameter and wall thickness, the same steel grade, the same cast, the same manufacturing process, subjected to the same finishing treatment in a continuous furnace or heat treated in the same furnace charge in a batch-type furnace.

The number of tubes per test unit shall conform to Table 16:

The manufacturing length (e.g. the rolled length after the normalizing forming process) may differ from the delivery length providing there is no additional HT after cutting the manufacturing lengths into individual lengths.

**Table 16 — Number of tubes per test unit**

| Outside diameter $D$ (mm) | Maximum number of tubes per test unit |
|---------------------------|---------------------------------------|
| $D \leq 114,3$            | 200                                   |
| $114,3 < D \leq 323,9$    | 100                                   |
| $D > 323,9$               | 50                                    |

#### 10.1.2 Number of sample tubes per test unit

The following number of sample tubes shall be selected from each test unit:

- Test category 1: one sample tube;
- Test category 2: two sample tubes; when the total number of tubes is less than 20, only one sample tube.

### 10.2 Preparation of samples and test pieces

#### 10.2.1 Selection and preparation of samples for product analysis

Samples for product analysis shall be taken from the test pieces or samples for mechanical testing or from the whole wall thickness of the tube at the same location as the mechanical test samples in accordance with EN ISO 14284.

#### 10.2.2 Location, orientation and preparation of samples and test pieces for mechanical tests

##### 10.2.2.1 General

Samples and test pieces shall be taken at the tube ends and in accordance with the requirements of EN ISO 377.

##### 10.2.2.2 Test pieces for tensile tests

The test pieces for the tensile tests at room temperature shall be prepared in accordance with EN ISO 6892-1.

The test pieces for the tensile tests at elevated temperature shall be prepared in accordance with EN ISO 6892-2.

At the manufacturer's discretion:

- for tubes with an outside diameter  $D \leq 219,1$  mm the test piece shall be either a full tube section or a strip section and shall be taken in a direction longitudinal to the axis of the tube;
- for tubes with an outside diameter  $D > 219,1$  mm the test piece shall either be a machined test piece with circular cross section from an unflattened sample or a strip section and be taken in a direction either longitudinal or transverse to the axis of the tube.

### 10.2.2.3 Test pieces for the flattening test, ring tensile test, drift expanding test and ring expanding test

The test pieces for the flattening test, ring tensile test, drift expanding test and the ring expanding test shall consist of a full tube section in accordance with EN ISO 8492, EN ISO 8496, EN ISO 8493 or EN ISO 8495, respectively.

### 10.2.2.4 Test pieces for impact test


Three standard Charpy V-notch test pieces shall be prepared in accordance with EN ISO 148-1. If the wall thickness is such that standard test pieces cannot be produced without flattening of the section, then test pieces of width less than 10 mm, but not less than 5 mm shall be prepared; the largest obtainable width shall be used.

Where test pieces at least 5 mm width cannot be obtained, the tubes shall not be subject to impact testing.

The test pieces shall be taken transverse to the tube axis unless  $D_{\min}$ , as calculated by the following formula, is greater than the specified outside diameter, in which case longitudinal test pieces shall be used:

$$D_{\min} = (T-5) + [ 756,25 / (T-5) ] \quad (5)$$

The test pieces shall be prepared such that the axis of the notch is perpendicular to the surface of the tube; see Figure 2.

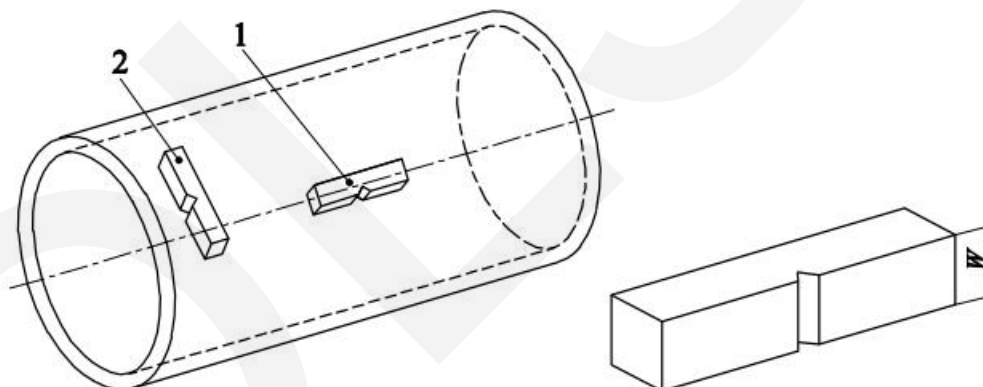

#### Key

- 1 longitudinal test piece
- 2 transverse test piece
- w specimen width

Figure 2 — Impact test piece orientation

## 11 Verification test methods

### 11.1 Chemical analysis

The elements to be determined and reported shall be those specified in Table 2. The choice of a suitable physical or chemical analytical method for the analysis shall be at the discretion of the manufacturer. In cases of dispute the method used shall be agreed between manufacturer and the purchaser, taking into account CEN/TR 10261.



## 11.2 Tensile test

### 11.2.1 Tensile test at room temperature

The test shall be carried out at room temperature in accordance with EN ISO 6892-1 and the following shall be determined:

- the tensile strength ( $R_m$ );
- the upper yield strength ( $R_{eH}$ ) or if a yield phenomenon is not present the 0,2 % proof strength ( $R_{p0,2}$ );
- the percentage elongation after fracture with a reference to a gauge length ( $L_0$ ) of  $5,65 \cdot \sqrt{S_0}$ ; if a non-proportional test piece is used, the percentage elongation value shall be converted to the value for a gauge length  $L_0 = 5,65 \cdot \sqrt{S_0}$  using the conversion tables in EN ISO 2566-1.

### 11.2.2 Tensile test at elevated temperature

The test shall be carried out in accordance with EN ISO 6892-2 at 400 °C or 300 °C in accordance with the steel grade concerned and the following shall be determined:

- the 0,2 % proof strength ( $R_{p0,2}$ );
- the tensile strength ( $R_m$ ).

## 11.3 Flattening test

The test shall be carried out in accordance with EN ISO 8492.

The tube section shall be flattened in a press until the distance  $H$  between the platens reaches the value given by the following formula:

$$H = \frac{(1 + C)}{C + (T / D)} x T \quad (6)$$

where

$H$  is the distance between platens, in millimetres, to be measured under load;

$D$  is the specified outside diameter, in millimetres;

$T$  is the specified wall thickness, in millimetres;

$C$  is the constant factor of deformation the value of which is:

- 0,07 for steel grades with specified minimum yield strength  $\leq 355$  MPa;
- 0,05 for steel grades with specified minimum yield strength  $\geq 460$  MPa.

After testing, the test piece shall be free from cracks or breaks. However, slight incipient cracks at its edges shall not be regarded as justification for rejection.

## 11.4 Ring tensile test

The test shall be carried out in accordance with EN ISO 8496.

The tube section shall be subjected to strain in the circumferential direction until fracture occurs.



After fracture, the test pieces shall not show any visible cracks without the use of magnifying aids (excluding the fracture point).

### 11.5 Drift expanding test

The test shall be carried out in accordance with EN ISO 8493.

The tube section shall be expanded with a 60° conical tool until the percentage increase in outside diameter shown in Table 17 is reached.

**Table 17 — Drift expanding test requirements**

| Steel grade               | % increase in outside diameter for $d/D$ <sup>a</sup> |                  |         |
|---------------------------|-------------------------------------------------------|------------------|---------|
|                           | $\leq 0,6$                                            | $> 0,6 \leq 0,8$ | $> 0,8$ |
| All steel grades          | 8                                                     | 10               | 15      |
| <sup>a</sup> $d = D - 2T$ |                                                       |                  |         |

After testing, the test piece shall be free from cracks or breaks. However, slight incipient cracks at its edges shall not be regarded as justification for rejection.

### 11.6 Ring expanding test

The test shall be carried out in accordance with EN ISO 8495.

The tube section shall be expanded with a conical tool until it breaks. The surface outside the fracture zone shall be free from cracks or breaks. However, slight incipient cracks at its edges shall not be regarded as justification for rejection.

### 11.7 Impact test

**11.7.1** The test shall be carried out (but see 10.2.2.4) in accordance with EN ISO 148-1, at - 20 °C for the basic and elevated temperature quality and at the relevant lowest temperature in accordance with Table 7 for the low and special low temperature quality.

**11.7.2** The mean value of the three test pieces shall meet requirements given in Table 7. One individual value may be below the specified value, provided that it is not less than 70 % of that value.

**11.7.3** If the width (W) of the test piece is less than 10 mm, the measured impact energy ( $KV_p$ ) shall be converted to the calculated impact energy (KV) using the following formula:

$$KV_c = \frac{10 \times KV_p}{W} \quad (7)$$

where

$KV_c$  is the calculated impact energy, in joules;

$KV_p$  is the measured impact energy, in joules;

w is the width of the test piece, in millimetres.

The calculated impact energy  $KV_c$  shall conform to the requirements given in 11.7.2.

**11.7.4** If the requirements of 11.7.2 are not met, then an additional set of three test pieces may be taken at the discretion of the manufacturer from the same sample and tested. To consider the test unit as conforming, after testing the second set, the following conditions shall be satisfied simultaneously:

— the average value of the six tests shall be equal to or greater than the specified minimum average value;

- not more than two of the six individual values may be lower than the specified minimum average value;
- not more than one of the six individual values may be lower than 70 % of the specified minimum average value.

**11.7.5** The dimensions in millimetres of the test pieces, the measured impact energy values and the resulting average value shall be reported.

## 11.8 Leak tightness test

### 11.8.1 Hydrostatic test

The hydrostatic test shall be carried out at a test pressure of 70 bar<sup>1)</sup> or at a test pressure  $P$  calculated using the following formula, whichever is lower:

$$P = 20 \frac{S \times T}{D} \quad (8)$$

where

$P$  is the test pressure, in bar;

$D$  is the specified outside diameter, in millimetres;

$T$  is the specified wall thickness, in millimetres;

$S$  is the stress, in MPa, corresponding to 70 % of the specified minimum yield strength (see Table 4) for the steel grade concerned.

The test pressure shall be held for not less than 5 s for tubes with an outside diameter  $D$  less than or equal to 457 mm and for not less than 10 s for tubes with an outside diameter  $D$  greater than 457 mm.

The tube shall withstand the test without showing leakage.

**NOTE** This hydrostatic leak-tightness test is not a strength test.

**Option 14:** A test pressure different from that specified in 11.8.1 and corresponding to stresses below 90 % of the specified minimum yield strength (see Table 4) for the steel grade concerned is specified.

### 11.8.2 Electromagnetic test

The test shall be carried out in accordance with EN ISO 10893-1.

## 11.9 Dimensional inspection

Specified dimensions, including straightness, shall be verified.

The outside diameter shall be measured at tube ends. For tubes with outside diameter  $D \geq 406,4$  mm, the diameter may be measured using a circumference tape.

Unless option 15 is specified, the wall thickness shall be measured at both tube ends.

**Option 15:** The wall thickness shall be measured away from the tube ends in accordance with an agreed procedure.

1) 1 bar = 100 kPa.

## 11.10 Visual examination

Tubes shall be visually examined to ensure conformity to the requirements of 8.4.1.

## 11.11 Non-destructive testing

**11.11.1** Tubes of test category 2 shall be subjected Non-Destructive Testing for the detection of longitudinal imperfections, in accordance with EN ISO 10893-10, to acceptance level U2 sub-category C or EN ISO 10893-3 acceptance level F2.

Unless option 16 is specified, the selection of the method is at the discretion of the manufacture.

**Option 16:** *The test method is specified by the purchaser.*

Regions at the tube ends not automatically tested shall either be subjected to manual/semi-automatic ultrasonic testing in accordance with EN ISO 10893-10 to acceptance Level U2, sub-category C, or be cropped off.

**11.11.2** If option 7 is specified, the tubes shall be submitted to ultrasonic testing for the detection of transverse imperfections in accordance with EN ISO 10893-10 to acceptance level U2 sub-category C.

**11.11.3** If option 8 is specified, the tubes shall be submitted to ultrasonic testing for the detection of the laminar imperfections in accordance with EN ISO 10893-8 to acceptance level U2.

**11.11.4** For tubes ordered by minimum wall thickness  $T_{min}$  (see option 10), the acceptance level shall apply to the calculated wall thickness  $T_c$  as determined in accordance with the formula stated in Clause 8.

## 11.12 Material identification

Each tube made of steel grades P460, P620 and P690 shall be tested by an appropriate method to ensure that the correct grade is being supplied.

## 11.13 Retests , sorting and reprocessing

For retest, sorting and reprocessing, the requirements of EN 10021 shall apply.

# 12 Marking

## 12.1 Marking to be applied

The marking shall be indelibly marked on each tube at least at one end. For tubes with outside diameter  $D \leq 51$  mm the marking on tubes may be replaced by the marking on a label attached to the bundle or box.

The marking shall include the following information:

- the manufacturer's name or trade mark;
- the number of this European Standard and the steel name (see 5.2);
- the test category except for grade P 620 and P 690 (see 9.3);
- the cast number or a code number;
- the mark of the inspection representative;
- an identification number (e.g. order or item number) which permits the correlation of the product or delivery unit to the related documents.

Example of marking:

EXAMPLE      X - EN 10216-3 - P355N - TC1 - Y - Z<sub>1</sub> - Z<sub>2</sub>



where

- X is the manufacturer's mark;
- TC1 is the designation of the test category 1;
- Y is the cast number or a code number;
- Z<sub>1</sub> is the mark of the inspection representative;
- Z<sub>2</sub> is the identification number.

## 12.2 Additional marking

**Option 17:** *Additional marking, as agreed upon at the time of enquiry and order, shall be applied.*

## 13 Protection

The tubes shall be delivered without a temporary protective coating.

**Option 18:** *A temporary protective coating or durable coating and/or lining shall be applied.*



## Annex A (informative)

### Elevated temperature properties for steel grades P275NL1 and NL2

**Table A.1 - Minimum 0,2 % - proof strength <sup>a</sup>**

| Wall thickness <i>T</i><br>mm | <i>R<sub>p 0,2</sub></i> (MPa) at a temperature of °C |     |     |     |     |     |     |
|-------------------------------|-------------------------------------------------------|-----|-----|-----|-----|-----|-----|
|                               | 100                                                   | 150 | 200 | 250 | 300 | 350 | 400 |
| ≤ 20                          | 255                                                   | 235 | 206 | 186 | 157 | 137 | 118 |
| > 20 to ≤ 50                  | 245                                                   | 226 | 206 | 186 | 157 | 137 | 118 |
| > 50 to ≤ 65                  | 235                                                   | 216 | 196 | 177 | 147 | 127 | 108 |
| > 65 to ≤ 80                  | 226                                                   | 206 | 186 | 167 | 137 | 117 | 98  |
| > 80 to ≤ 100                 | 216                                                   | 196 | 177 | 157 | 127 | 108 | 88  |
| <sup>a</sup> See 8.3.2.       |                                                       |     |     |     |     |     |     |

**Table A.2 - Minimum tensile strength <sup>a</sup>**

| Wall thickness <i>T</i><br>mm | <i>R<sub>m</sub></i> (MPa) at a temperature of °C |     |     |     |     |     |     |
|-------------------------------|---------------------------------------------------|-----|-----|-----|-----|-----|-----|
|                               | 100                                               | 150 | 200 | 250 | 300 | 350 | 400 |
| ≤ 30                          | 340                                               | 330 | 310 | 310 | 310 | 300 | 290 |
| > 30 to ≤ 50                  | 320                                               | 310 | 290 | 290 | 290 | 280 | 270 |
| > 50 to ≤ 80                  | 300                                               | 290 | 270 | 270 | 270 | 260 | 250 |
| > 80 to ≤ 100                 | 290                                               | 280 | 260 | 260 | 260 | 250 | 240 |
| <sup>a</sup> See 8.3.2.       |                                                   |     |     |     |     |     |     |

## **Annex B** (informative)

### **Technical changes from the previous edition**

#### **B.1 Introduction**

This informative annex is intended to guide the user to places where significant technical changes have been introduced into the previous edition of this European Standard. Editorial changes are not included in this annex. References refer to the previous edition.

While this annex is intended to be comprehensive, the user should satisfy himself that he fully understands the changes which have been made. The user is ultimately responsible for recognising any differences between this edition and the previous edition of the document.

#### **B.2 Technical changes**

- 1 Scope
- 2 Normative references
- 6 Information to be supplied by the purchaser
  - 6.2 Options [6), 12) and 13)]
  - 6.3 Example of an order
- 7 manufacturing process
  - 7.1 Steelmaking process
- 8 Requirements
  - 8.2 Chemical composition (Table 2)
  - 8.6 Preparation of ends
- 9 Inspections
  - 9.1 Types of inspections
  - 9.2 Inspection documents (9.2.1)
- 10 Sampling
  - 10.1 Frequency of tests (10.1.1)
- 11 Verification of test methods
  - 11.2 Tensile test

## Annex ZA (informative)

### Relationship between this European Standard and the Essential Requirements of EU Directive 97/23/EC

This European Standard has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association to provide a means of conforming to Essential Requirements of the New Approach Directive 97/23/EC.

Once this standard is cited in the Official Journal of the European Union under that Directive and has been implemented as a national standard in at least one Member State, compliance with the clauses of this standard given in Table ZA.1 confers, within the limits of the scope of this standard, a presumption of conformity with the corresponding Essential Requirements of that Directive and associated EFTA regulations.

**Table ZA.1 — Correspondence between this European Standard and the essential requirements of the EU Directive 97/23/EC**

| <b>Clauses/subclauses<br/>of this EN</b> | <b>Essential Requirements<br/>(ERs) of the Directive 97/23/EC</b> | <b>Qualifying<br/>remarks/Notes</b>       |
|------------------------------------------|-------------------------------------------------------------------|-------------------------------------------|
| 8.3                                      | Annex I, 4.1a                                                     | Appropriate material<br>properties        |
| 7.1 and 8.2                              | Annex I, 4.1c                                                     | Ageing                                    |
| 7.2 and 8.4                              | Annex I, 4.1d                                                     | Suitable for the<br>processing procedures |
| 9 and 10                                 | Annex I, 4.3                                                      | Documentation                             |

**WARNING:** Other requirements and other EU Directives may be applicable to the product(s) falling within the scope of this standard.

## Bibliography

- [1] EN ISO 9712:2012, *Non-destructive testing - Qualification and certification of NDT personnel (ISO 9712)*
- [2] EN ISO 10893-2, *Non-destructive testing of steel tubes - Part 2: Automated eddy current testing of seamless and welded (except submerged arc-welded) steel tubes for the detection of imperfections (ISO 10893-2)*



DLS

# British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

## About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

## Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at [bsigroup.com/standards](http://bsigroup.com/standards) or contacting our Customer Services team or Knowledge Centre.

## Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at [bsigroup.com/shop](http://bsigroup.com/shop), where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

## Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to [bsigroup.com/subscriptions](http://bsigroup.com/subscriptions).

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

**PLUS** is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit [bsigroup.com/shop](http://bsigroup.com/shop).

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email [bsmusales@bsigroup.com](mailto:bsmusales@bsigroup.com).

## Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

## Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

## Useful Contacts:

### Customer Services

**Tel:** +44 845 086 9001

**Email (orders):** [orders@bsigroup.com](mailto:orders@bsigroup.com)

**Email (enquiries):** [cservices@bsigroup.com](mailto:cservices@bsigroup.com)

### Subscriptions

**Tel:** +44 845 086 9001

**Email:** [subscriptions@bsigroup.com](mailto:subscriptions@bsigroup.com)

### Knowledge Centre

**Tel:** +44 20 8996 7004

**Email:** [knowledgecentre@bsigroup.com](mailto:knowledgecentre@bsigroup.com)

### Copyright & Licensing

**Tel:** +44 20 8996 7070

**Email:** [copyright@bsigroup.com](mailto:copyright@bsigroup.com)

## BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK